

# Jeep '72—tougher guts, brighter looks!



**Jeep** The ultimate in off-road performance.



**Jeep Commando** New guts with a sporty new look.



**Jeep Truck** The only pickup truck built with 4-wheel drive from the ground up.



**Jeep Wagoneer** One of the most luxurious 4-wheel drive station wagons in the world.





432 Champagne White



# Jeep

# 1972 EXTERIOR COLORS


"Diamond-Glo"  
Super Enamel  
Multi-Coated  
Baked Finish




494 Skyway Blue



492 Jetset Blue, Metallic

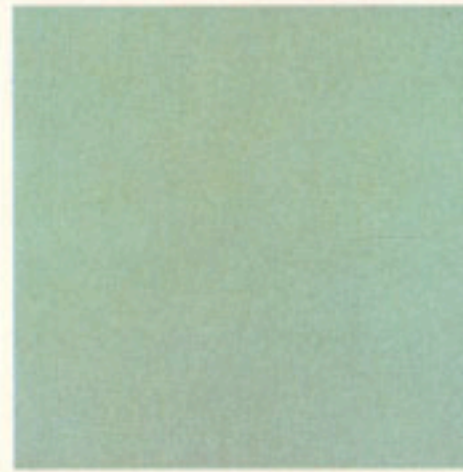

491 Julep Green, Metallic

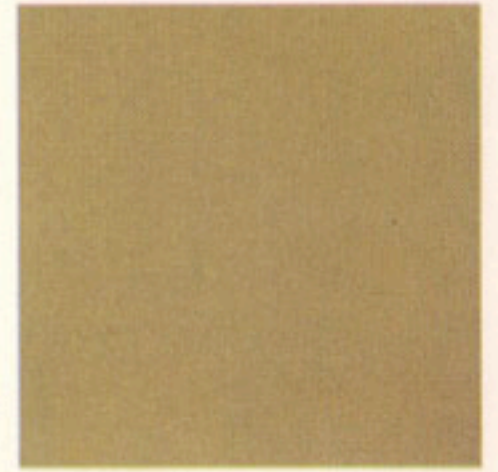

431 Avocado Mist, Metallic



493 Yuca Tan, Metallic



490 Butterscotch Gold



495 Canary Yellow



226 President Red

## JEEP FLEET COLORS



21 Raven Black



504 Forest Green



135 Omaha Orange



81 Transport Yellow



394 Marlin Blue, Metallic



221 Federal Gray





# 1972 VEHICLE SPECIFICATIONS\*

|                               | JEEP WAGONEER                   | JEEP TRUCK           |                    |                    |                    |                    |                                     | JEEP                 |                                 | JEEP COMMANDO        |        |               |
|-------------------------------|---------------------------------|----------------------|--------------------|--------------------|--------------------|--------------------|-------------------------------------|----------------------|---------------------------------|----------------------|--------|---------------|
|                               | 1414                            | J-2500               | J-2600             | J-4500             | J-4600             | J-4700             | J-4800                              | CJ-5                 | CJ-6                            | ROADSTER             | PICKUP | STATION WAGON |
| Wheelbase                     | 110.0"                          | 120.0"               |                    | 132.0"             |                    |                    |                                     | 84.0"                | 104.0"                          | 104.0"               |        |               |
| GVW, Standard (lbs)           | 5600                            | 5000                 | 6000               | 5000               | 6000               | 7000               | 8000                                | 3750                 | 3900                            | 3900                 |        |               |
| GVW, Maximum (lbs)            | 5600                            | 5000                 | 6000               | 5000               | 6000               | 7000               | 8000                                | 4500                 | 4750                            | 4700                 |        |               |
| Cargo Bed Length              | 81.6"                           | 84.3" (Pickup)       |                    | 96.3" (Pickup)     |                    |                    |                                     | 39.8"                | 59.8"                           | 64.0"                | 62.3"  | 64.0"         |
| Standard Tires                | 7.75 x 15<br>4-ply              | 8.25 x 15<br>4-ply   | 7.00 x 16<br>8-ply | 8.25 x 15<br>4-ply | 7.00 x 16<br>8-ply | 7.50 x 16<br>8-ply | 7.50 x 16<br>10-ply                 | 7.35 x 15<br>4-ply   |                                 | 7.35 x 15<br>4-ply   |        |               |
| Tread—Front                   | 57.0"                           | 63.5"                | 63.5"              | 63.9"              |                    |                    |                                     | 51.5"                |                                 | 51.5"                |        |               |
| Tread—Rear                    | 57.0"                           | 63.8"                | 63.8"              | 64.4"              |                    |                    |                                     | 50.0"                |                                 | 50.0"                |        |               |
| Ground Clearance (minimum)    | 7.8"                            | 7.9"                 | 8.9"               | 7.9"               | 8.9"               |                    |                                     | 8.0"                 | 8.0"                            | 7.5"                 |        |               |
| Turning Diameter—curb to curb | 44.4'                           | 49.5'                |                    | 52.0'              |                    |                    |                                     | 32.9'                | 37.6'                           | 37.8'                |        |               |
| Fuel Tank Capacity (gals.)    | 22.0                            | 20.0                 |                    | 20.0               |                    |                    |                                     | 16.5                 | 16.5                            | 16.5                 |        |               |
| Transmission—standard         | 3-speed, col. shift             | 3-speed, floor shift |                    |                    |                    |                    | H.D. 4-speed,<br>floor shift        | 3-speed, floor shift |                                 | 3-speed, floor shift |        |               |
| Transmission—optional         | Turbo Hydra-Matic, column shift |                      |                    |                    |                    |                    | H.D. 4-speed, floor shift<br>(CJ-5) |                      | Turbo Hydra-Matic, column shift |                      |        |               |
|                               | Heavy Duty 4-speed, floor shift |                      |                    |                    |                    |                    | —                                   |                      | H.D. 4-speed, floor shift       |                      |        |               |

## ENGINES (All engines run on regular, low-lead or no-lead fuel. With no-lead, use alternate tank fills of regular.)

| ENGINE                       | 232-6                  | 258-6         | 304 V-8                | 360 V-8                                    |
|------------------------------|------------------------|---------------|------------------------|--|
| Number of Cylinders          | 6-Cylinder             | 6-Cylinder    | 8-Cylinder             | 8-Cylinder                                 |
| Type of Valve Arrangement    | OHV in line            | OHV in line   | 90° OHV                | 90° OHV                                    |
| Piston Displacement (cu in.) | 232                    | 258           | 304                    | 360  |
| Compression Ratio            | 8.0:1                  | 8.0:1         | 8.4:1                  | 8.5:1                                      |
| Bore and Stroke              | 3.75" x 3.50"          | 3.75" x 3.90" | 3.75" x 3.44"          | 4.08" x 3.44"                              |
| Net Horsepower @ RPM         | 100 @ 3600             | 110 @ 3500    | 150 @ 4200             | 175 @ 4000                                 |
| Net Torque @ RPM             | 185 @ 1800             | 195 @ 2000    | 245 @ 2500             | 285 @ 2400                                 |
| Standard                     | CJ-5/CJ-6 and Commando |               | —                      | 7000 & 8000 GVW Truck                      |
| Optional                     | —                      |               | CJ-5/CJ-6 and Commando | All Models except<br>7000 & 8000 GVW Truck |
|                              |                        |               |                        | Wagoneer and<br>5000 & 6000 GVW Truck      |

\*Vehicle Specifications shown are with Standard Equipment.

All specifications subject to change without notice.